



SPEEDFACE - 8 TM



Face



Temperature
Detection



Live Body
Detection



Touch
Screen



WiFi



LAN



USB




Access
Control

Facial Attendance and Access Control

Storage Capacity

Face ID Capacity	1,00,000
Max User	1,00,000
Card Capacity	1,00,000
Log Capacity	10,00,000

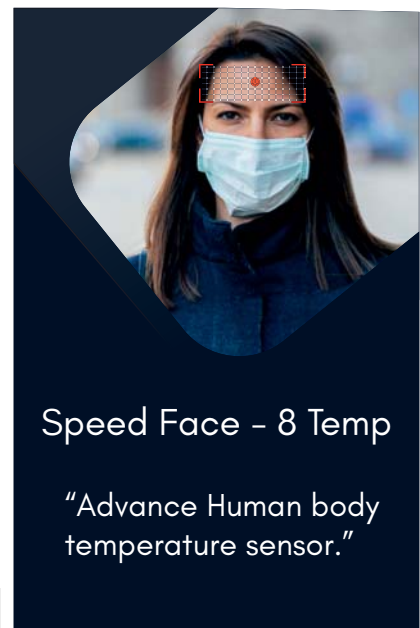

Speed Face - 8 Temp

"Advance Human body
temperature sensor."

Features

Industrial grade design, with stable performance & smooth line

8-inch IPS display all-sight LCD touch screen.

Dual core ARM cortex - A7 @900MHz Processor

Detect human body temperature through face

Recognition speed 0.5 seconds

SpeedFace - 8 TM

Communication Interface

Communication	WIFI, TCP/IP, USB
---------------	-------------------

Biometric

Push Data	YES
Remote firmware update	YES
FAR	0.001%
Accuracy ratio	99.27%
Processor	Dual Core ARM Cortex-A7 @900MHz
OS	Linux
Anti Backlight	YES
Verification time	<=1 second
Additional Feature	Temperature Detection Sensor

Audio/Visual

LCD	8.0" IPS touch screen display
Screen Resolution	800 x 1280
Camera Specification	2 MP
Shutter type	Electronic Rolling Shutter
Body Temperature display	YES

Access control

Living body detection	YES
Relay	YES
Storage	1GB RAM , 8GB ROM

Power & Environment

Operating Temperature	-10°C ~ 50°C
Environment for Temperature Measurement	22°C ~ 32°C
Temperature Measurement Distance	30cm ~ 50cm
Temperature Measurement Range	35.5°C ~ 42°C (95.9°F ~ 107.6°F)
Power	12V DC / 2A
Dimension	300 X 130 X 90 mm



Auto Focus



low light Verification



Detect Body Temperature

Software

Web & Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by   

www.biomaxsecurity.com

Connect with us on

 BiomaxOfficial  BioMax Security
 biomaxsecurity  BioMax Access Control