

N-BM70W Pro Ultimate Multi Bio



Face



Finger



RFID



Inbuilt Battery



WiFi



LAN



USB



Access Control

Multi-Bio Attendance and Access Control System

Storage Capacity

Face Capacity	500
Finger Capacity	2000
Card Capacity	2,000
Max User	2000
Log Capacity	1,50,000

Features

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.


Output relay for door open.

Face, Fingerprint, Card, Password authentication

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.

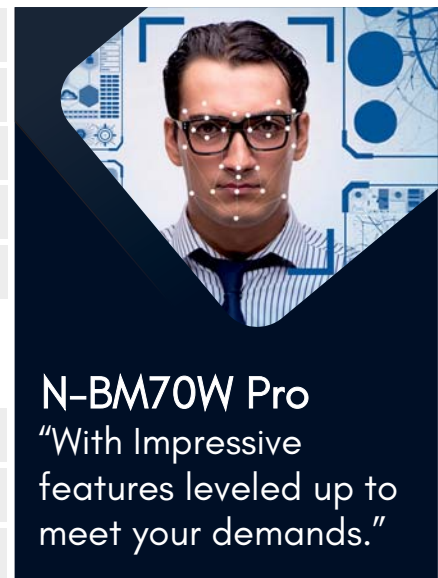

N-BM70W Pro

Communication Interface

Communication	Wi-Fi, TCP/IP, USB Host
---------------	-------------------------

Biometric

Push Data	YES
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Verification time	<1 second
RF card options	125kHz EM (Standard) / 13.56MHz Mifare (Optional)

Audio/Visual

LCD	2.8" TFT color screen
LED Indicator	Green/Red
LED for day night vision	Array LED
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Access control

Relay	YES
Support	Remote, Push Button, No Touch

Power & Enviroment

Inbuilt Battery Backup	YES (BIS standard)
Power	12V 2Am (BIS standard)
Operating Temperature	0°C ~ 50°C
Operating Humidity	20% - 80%
Dimension (L*H*W)	160 x 140 x 65 mm



Auto Focus



low light Verification



Long Distance Verification



Accepts Color Finger

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control