



N-BioAccess Face



Face



Finger



RFID



WiFi



LAN



USB




Access Control

Multi-Bio Attendance and Access Control

Storage Capacity

Face Capacity	1000
Finger Capacity	10,000
Card Capacity	10,000
Max User	10,000
Password	10,000
Log Capacity	2,00,000

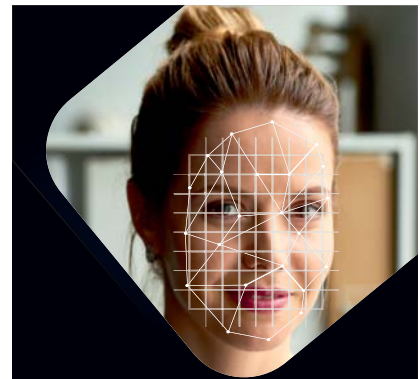

N-BioAccess
Face

Features

High-Speed and Accurate Fingerprint Identification

Face, Fingerprint, Card, Password authentication

Feather touch keypad.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

N-BioAccess Face

Communication Interface

Communication	WiFi, RS 485, TCP/IP, USB
---------------	---------------------------

Biometric

Push Data	YES
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
OS	Linux
Verification Time	<=1 second
RF card options	125kHz EM / 13.56MHz Mifare (Optional)

Audio/Visual

LCD	2.8" TFT color screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English
Keypad	Feather Touch Keypad

Access control

Relay	YES
Anti Passback	YES
Support Reader	RS485, Wiegand Reader, Exit Switch, Remote, No Touch

Power & Environment

Operating Temperature	0°C ~ 50°C
Power	12V DC / 2A
Dimension (L*H*W)	75 x 200 x 35 mm



Auto Focus



High-Speed and Accurate Fingerprint Identification



Low light Verification



WiFi, RS485, TCP/IP, USB



Unaffected by High Temperatures 0° ~ 50°

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service







Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on

 BiomaxOfficial  BioMax Security
 biomaxsecurity  BioMax Access Control