


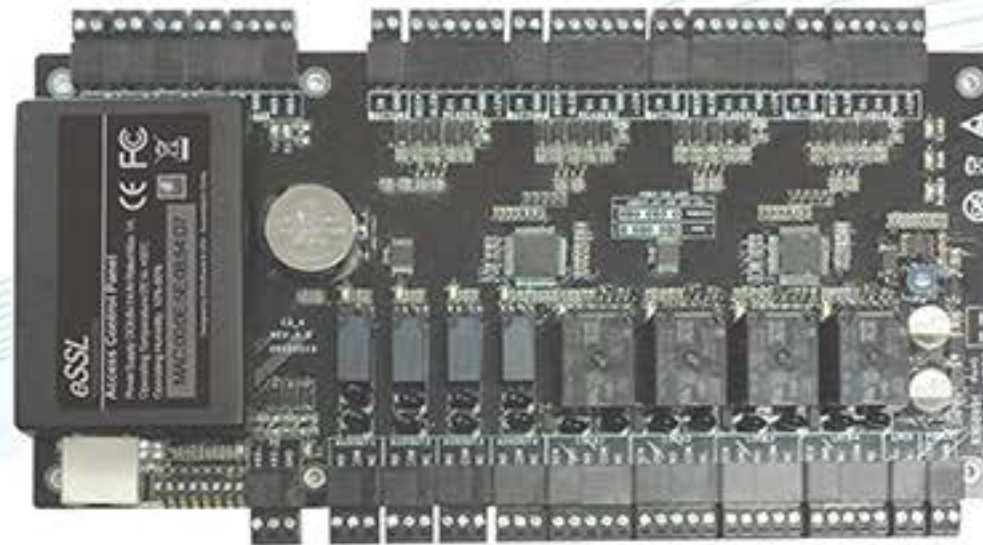

C3-400

➔ Advanced Multidoor Access Control System - 4 Door

User Capacity: 30,000
 Event Buffer: 1,00,000
 CPU: 32bit MIPS CPU
 RAM: 32MB
 Flash Memory: 128 MB
 Power/Current: DC 9.6V-14.4V, Rated Max. 1A
 Communication: RS485, TCP/IP
 LED Indicator: Yes, LED indication for communication, power status and punch card
 Baud rate: 38400 BPS(Recommended), 9600 BPS, 19200 BPS(Selectable)
 Operating Temperature: 0°C - 55°C
 Operating Humidity: 10% to 80% relative humidity non-condensing
 Dimension (mm): 218(W) x 106(H) (Single board) 345(W) x 275(H) x 70(D)
 (With power supply and metal box)
 Support : Proximity /Mifare / HID Readers
Options: Wiegand Readers - 4
 RS 485 Readers - 8

Features:

- ▶ 256 time Zones, 256 access levels
- ▶ Anti-passback function
- ▶ Interlock function , Linkage function
- ▶ Multi-Card Opening function, Remote door opening and closing
- ▶ Real-Time monitoring Via Web browser
- ▶ 4 auxiliary input may be connected to infrared body detectors,
- ▶ fire alarms, smoke detectors etc.
- ▶ 4 auxiliary output may be connected to alarms, cameras, door bells etc.

Software and Database Supported :

1. Access Security System 3.5 (Desktop Version)
 Database Type:- MS Access / MS SQL