

## DS-KIS202 Video Door Phone

### Key Features

#### Door Station


- Self-adaptive IR supplement
- One-touch calling
- Pinhole camera with 720 x 576 @ 25 fps
- Unlock controlling

#### Indoor Station

- Hands-free video intercom communication
- Supports monitoring the door station and the external analog camera
- Remote unlocking
- Convenient installation and easy operation



### Typical Application

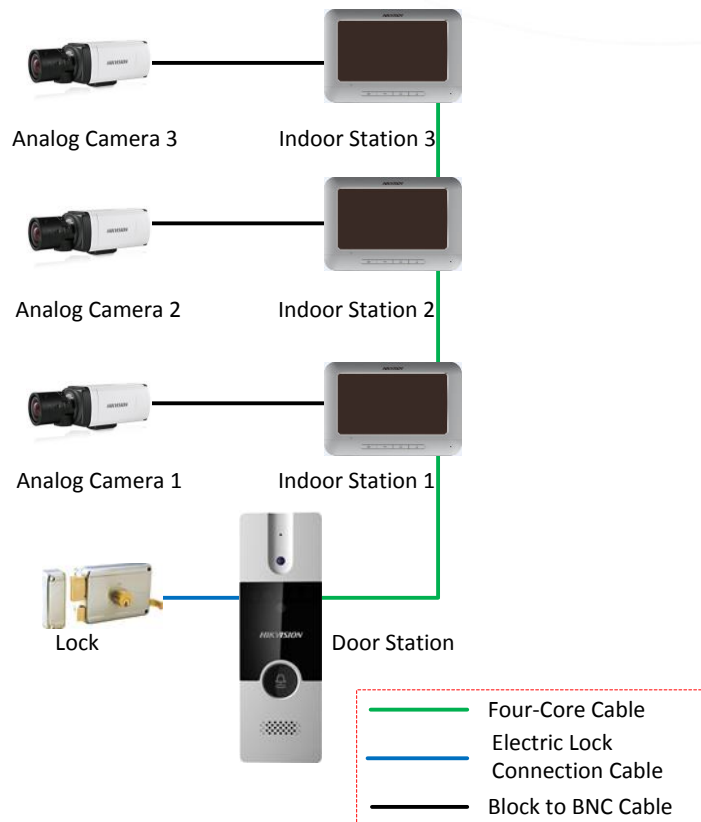


## Specifications


|                                    |  |
|------------------------------------|--|
| <b>Video Door Phone Model</b>      | <b>DS-KIS202</b>   |
| <b>Door Station (DS-KB2411-IM)</b> |  |
| <b>Video Parameters</b>            |  |
| Camera                             | 1/4" CMOS  |
| Resolution                         | 720 × 576  |
| Video frame rate                   | PAL: 25 fps  |
| <b>Audio parameters</b>            |  |
| Audio input                        | Built-in Omnidirectional Microphone  |
| Audio output                       | Built-in Loudspeaker   |
| Audio quality                      | Noise Suppression and Echo Cancellation  |
| <b>Light Supplement</b>            |  |
| Light supplement mode              | Photosensitive IR Supplement, IR Range: 2 Meters   |
| <b>Device interfaces</b>           |  |
| Four-wire interface                | 1 Four-Wire Interface (1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding) |
| IO output                          | 1 Relay Output   |
| <b>General</b>                     |  |
| Material                           | Aluminum Alloy   |
| Power consumption                  | Max. 3W  |
| Working temperature                | -30° C to +60° C (-22° F to 140° F)  |
| Working humidity                   | 10% to 90%   |
| Dimension (L x W x H)              | 128 mm × 42 mm × 24.8 mm (5.0" × 1.7" × 0.9")  |
| <b>Indoor Station (DS-KH2220)</b>  |  |
| <b>Display parameters</b>          |  |
| Display screen                     | 7-Inch Colorful TFT LCD  |
| Display resolution                 | 800 × 480  |
| Operation method                   | Physical Button  |
| <b>Audio parameters</b>            |  |
| Audio input                        | Built-in Omnidirectional Microphone  |
| Audio output                       | Built-in Loudspeaker   |
| Audio quality                      | Noise Suppression and Echo Cancellation  |
| <b>Device interfaces</b>           |  |
| Four-wire interface                | 4 Four-Wire Interfaces   |
|                                    | 1-ch Video Input, 1-ch Audio Input/Output, 1-ch Power Supply, 1-ch Grounding                         |
| <b>General</b>                     |  |
| Power supply                       | 12 VDC   |
| Power consumption                  | ≤ 5 W  |
| Working temperature                | -10° C to + 55° C (14° F to 131° F)  |
| Working humidity                   | 10% to 90%   |
| Dimension (L x W x H)              | 195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")  |

## Appearance and Interfaces

**Door Station**

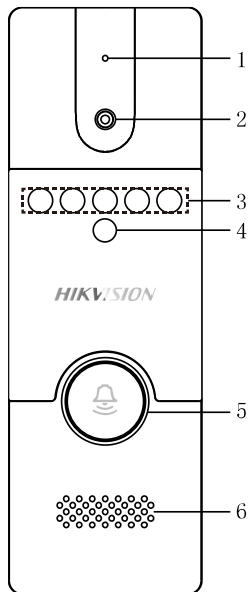

**Indoor Station**

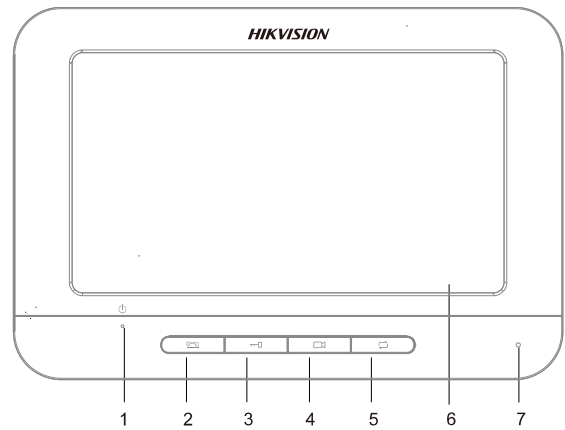

| Index | Description      |
|-------|------------------|
| 1     | Microphone       |
| 2     | Built-in Camera  |
| 3     | Supplement Light |
| 4     | Photoresistor    |
| 5     | Call Button      |
| 6     | Loudspeaker      |

| Index | Description             |
|-------|-------------------------|
| 1     | Power Supply Indicator  |
| 2     | Call Accept/Decline Key |
| 3     | Unlock Key              |
| 4     | Live View Key           |
| 5     | Switch Key              |
| 6     | LCD Display Screen      |
| 7     | Microphone              |

Distributed by

## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761