

DS-M5502HMI Series Mobile DVR

Introduction:

Adopting embedded Linux operating system, Hikvision DS-M5502HMI series dedicated Mobile DVR (Digital Video Recorder) provides powerful monitoring functionalities, including audio and video encoding & decoding, 2G & 3G & Wi-Fi wireless network transmission, satellite positioning service, secure data storage, hard disk vibration damping. It can both work alone as a recorder and cooperate with other devices to build a comprehensive surveillance system.

Thanks to the features of high stability, easy-to-carry and low power consumption, the DS-M5502HMI series Mobile DVR is widely applied to the surveillance projects of public transportation, school bus, etc.



Available Models:

DS-M5502HMI/BNC series



- The Wi-Fi function is only supported by the “/WT” devices.
- The 3G dialing function is only supported by the “/GW” devices.
- The 2G network function is only supported by the “/GG” devices.


Main Features:

- User-friendly GUI providing easy and flexible operations
- Standard 1DIN dimensions, supporting embedded and bracket installation
- Pluggable 3G (WCDMA), Wi-Fi (optional), and 2G (optional) module providing flexible data transmission solutions
- pluggable GNSS (Global Navigation Satellite System) module precisely positioning the vehicle via the satellite and recording the location information in the stream
- 2 analog channels of audio & video inputs connectable; each channel supporting up to WD1 resolution with H.264 encoding technology
- one 2.5-inch HDD/SSD and one SD/SDHC card pluggable, adopting hard disk vibration damping technology
- Information collection interfaces collecting driving information such as left/right turn, braking, backing up, etc.
- Hard disk box with USB interface supporting intelligent temperature control and data export
- Specialized aviation connectors ensuring signal stability
- Delay (0~6h) shutdown and 24-hour scheduled startup/shutdown
- Wide-range power input (+8VDC ~+36 VDC)
- Power-off protection avoiding key data from loss
- Tensile aluminum chassis with no fan design well adaptable to working environment

© 2014 by HIKVISION. All rights reserved.

Physical Interfaces:

Front Panel

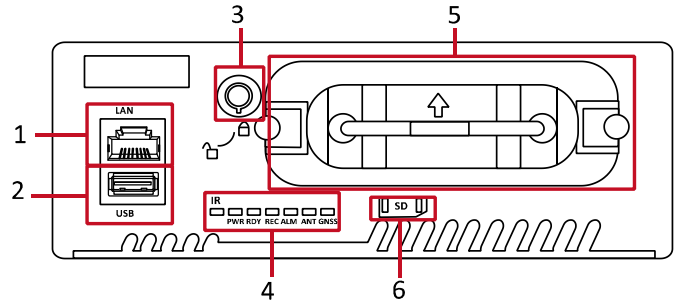

Index	Name	Description
1	LAN	10M/100M self-adaptive Ethernet interface
2	USB	USB interface
3	Hard disk lock	Lock/Unlock the hard disk box.
4	Indicators	IR: IR Receiver Receive IR signal from remote control.
		PWR: Power indicator Light in green after device startup; light in red when device standby.
		REY: Ready indicator Light in green after device starts up properly.
		REC: Record indicator Light in green during recording process.
		ALM: Alarm indicator Light in red when alarm occurs.
		ANT: 3G dialing indicator Light in steady green during dialing process; flash in green after dialing succeeded; The light is out when the dialing module is abnormal.
		GNSS: GNSS indicator Light in steady green during positioning process; flash in green after positioning succeeded; The light is out when the positioning module is abnormal.
5	Hard disk box	Insert one 2.5-inch SATA HDD/SSD for data storage.
6	SD card slot	Insert one SD card for data storage.

DS-M5502HMI/BNC series:

Model		DS-M5502HMI/BNC series
Video/Audio input	Analog video input	2-ch
		BNC interface, PAL / NTSC self-adaptive
	Audio input	2-ch BNC interface; corresponding to CH1, CH2
	IP video input	None
Video/Audio output	VGA output	1-ch Resolution: 1920×1080, 1280×1024, 1280×720, 1024×768
		CVBS output
	Audio output	1-ch; 3mm connector
Encoding/Decoding parameters	Video compression	H.264
	Encoding resolution	Main stream: WD1 / 4CIF / 2CIF / CIF
		Sub stream: CIF / QCIF
	Frame rate	PAL: 1~25fps; NTSC: 1~30fps
	Video bitrate	32Kbps~2Mbps; custom (Max.: 4Mbps)
	Audio compression	G.711
	Audio bitrate	16Kbps
	Stream type	Video, Video & Audio
Dual stream	Supported	
Hard disk	Type	One 2.5-inch SATA HDD/SSD
	Capacity	Up to 1TB capacity supported
	Installation	Pluggable
	Protection	3-generation hard disk box
	Backup	USB interfaces on hard disk box and device front panel supporting data backup
Wireless Network	3G	WCDMA (2G module optional)
	Wi-Fi (optional)	802.11 b/g/n supported, 2.4GHz
Positioning	GNSS	GPS; BDS (optional)
External interface	Two-way audio	G.722
	Alarm in	7-ch high/low level signal input; 1-ch pulse signal input; 3mm connector
	Alarm out	2-ch; 3mm connector
	Network interface	1; RJ45; 10M/100M self-adaptive Ethernet interface
	Antenna interface	SMA interfaces on pluggable module including one for 3G, one for Wi-Fi and one for GPS
	Serial interface	RS-232, RS-485, 3mm connector
	USB port	1 × USB2.0
	SIM card	1, standard SIM card slot
	SD/SDHC card	1, standard SD/SDHC card slot
General	Operating system	Linux
	Operating method	IR remote control
	Power supply	Input: +8~ +36VDC; Output: 12VDC/2A, 5VDC/1A
	Consumption	Standby: Max. 0.5W;

		Full load: Max.20W (without 7-inch screen)
	Working temperature	-10 °C ~ +55 °C (14 °F ~ 131 °F)
	Working humidity	10%~90%
	Dimensions (W×D×H)	178mm×170mm×50mm
	Weight	Aprox.1.6kg (without hard disk or SD/SDHC card)