


SATATYA CIBR50FL60CWS

5MP IR Bullet Camera with 6mm Lens









SATATYA CIBR50FL60CWS

5MP IR Bullet Camera with 6mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



H.265



IVA



HIGHER FIELD OF VIEW



SMART STREAMING



ADAPTIVE STREAMING



TRUE WDR



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91- 9315441078





SATATYA CIBR50FL60CWS

5MP IR Bullet Camera with 6mm Lens






IMAGE SENSOR	TECHNICAL SPECIFICATIONS		
1/2.8" SONY - CMOS 5MP Active Pixel Progressive Scan, Back Illuminated Image sensor (EXMOR Technology - STARVIS Series)			
Progressive Scan, Back Illuminated Image sensor (EXMOR Technology - STARVIS Series) LENS Colour - 0.01 Lux @F1.2 (AGC ON) Minimum Illumination	Resolution	5 MP (2592 x 1944)	
Progressive Scan, Back Illuminated Image sensor (EXMOR Technology - STARVIS Series) LENS Colour - 0.01 Lux @F1.2 (AGC ON) Minimum Illumination		1/2.8" SONY - CMOS 5MP Active Pixel	
Colour - 0.01 Lux @F1.2 (AGC ON)		· ·	
Colour - 0.01 Lux @F1.2 (AGC ON) Monochrome - 0 Lux	Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
Minimum Illumination Monochrome - 0 Lux Focal Length 6mm Focus Range 0.3m to infinity HFOV - 50° VFOV - 37° Field of View (FOV) DFOV - 62° Lens Mount M12 Focus Fixed focus Aperture (F#) F 1.6 Iris Type Fixed IR Range 50m IR Led Wavelength 850nm IR Switching Auto/ Manual HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Till:: 0° to 180° Rotation: 0° to 360° TMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) Stream Profiles 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QLIF Max Resolution 2592 x 1944 Bitrate Type CBR, VBR Video Compression	LENS		
Focal Length 6mm Focus Range 0.3m to infinity HFOV - 50° VFOV - 37° HFOV - 62° Field of View (FOV) DFOV - 62° Lens Mount M12 Focus Fixed focus Aperture (F#) F 1.6 Iris Type Fixed IR Range 50m IR Led Wavelength 850nm IR Switching Auto/ Manual HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) Stream Profiles 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kpps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG		Colour - 0.01 Lux @F1.2 (AGC ON)	
Focus Range 0.3m to infinity HFOV - 50° VFOV - 37° Field of View (FOV) HFOV - 62° Lens Mount M12 Focus Fixed focus Aperture (F#) F 1.6 Iris Type Fixed IR Range 50m IR Led Wavelength 850nm IR Switching Auto/ Manual HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions Max Resolution 2592 X 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	Minimum Illumination	Monochrome - 0 Lux	
HFOV - 50° VFOV - 37° DFOV - 62°	Focal Length	6mm	
Field of View (FOV) VFOV - 37° DFOV - 62° Lens Mount M12 Focus Fixed focus Aperture (F#) F 1.6 Iris Type Fixed IR Range 50m IR Led Wavelength 850nm IR Switching Auto/ Manual HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles 3 Stream Profiles 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolution VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kpps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	Focus Range	0.3m to infinity	
Field of View (FOV) DFOV - 62° Lens Mount M12 Focus Fixed focus Aperture (F#) F 1.6 Iris Type Fixed IR Range 50m IR Led Wavelength 850nm HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Timage AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Profile 3: 2048x1536@8fps (MJPEG) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG		HFOV - 50°	
Lens Mount M12		VFOV - 37°	
Focus Fixed focus Aperture (F#) F 1.6 Iris Type Fixed IR Range 50m IR Led Wavelength 850nm IR Switching Auto/ Manual HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	Field of View (FOV)	DFOV - 62°	
F 1.6 Iris Type	Lens Mount	M12	
Fixed Fixe	Focus	Fixed focus	
R Range 50m R Led Wavelength 850nm R Switching Auto/ Manual	Aperture (F#)	F 1.6	
IR Led Wavelength 850nm IR Switching Auto/ Manual HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Profile 3: 2048x1536@8fps (MJPEG) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	Iris Type	Fixed	
Name	IR Range	50m	
### HARDWARE SPECIFICATIONS SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180°	IR Led Wavelength	850nm	
SD Card Up to 512GB Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) Available Resolutions 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	IR Switching	Auto/ Manual	
Camera Adjustment Angle Pan: 0° to 180° Tilt: 0° to 180° Rotation: 0° to 360° IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	HARDWARE SPECIFICATIONS		
Tilt: 0° to 180° Rotation: 0° to 360° MAGE AND VIDEO	SD Card	Up to 512GB	
Rotation: 0° to 360°	Camera Adjustment Angle	7 5 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	
IMAGE AND VIDEO No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Profile 3: 2048x1536@8fps (MJPEG) 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG			
No of Stream Profiles 3 Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG			
Profile 1: 2592X1944 @30fps (H.264/H.265) Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG			
Profile 2: VGA @30fps (H.265/H.264) Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	No of Stream Profiles		
Stream Profiles Profile 3: 2048x1536@8fps (MJPEG) 2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG			
2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	Studens Duefiles		
Available Resolutions VGA, CIF, QCIF Max Resolution 2592 x 1944 Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG	Stream Profiles		
Max Resolution2592 x 1944Bitrate128kbps-16MbpsBitrate TypeCBR, VBRVideo CompressionH.265, H.264, MJPEG	Available Resolutions		
Bitrate 128kbps-16Mbps Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG		• •	
Bitrate Type CBR, VBR Video Compression H.265, H.264, MJPEG			
Video Compression H.265, H.264, MJPEG		<u> </u>	
•			
	•		
Shutter Speed 1/25-1/59000		·	

Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

Call as : +91-9315441053 +91-9315441078

www.MatrixVideoSurveillance.com





SATATYA CIBR50FL60CWS


Call as : +91-9315441053

+91- 9315441078

5MP IR Bullet Camera with 6mm Lens

Adaptive Streaming	Yes
ONVIF Profiles	S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	73db
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage full, Time triggered
EVENTS AND ACTIONS	
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
	IE: Matrix ActiveX Chrome: VLC plugin (2.0.4) and Quicktime(7.7.5)
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime(7.7.5)
OPERATING PARAMETERS	
Power Supply	12V (DC); 802.3af (PoE)
Power Consumption	<7W
Operating Humidity	Less than 90% RH (non-condensing)
Operating Temperature	-20°C to 50°C
Storage Temperature	-20°C to 50°C
PHYSICAL PARAMETERS	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)
Weight	880 gm
Colour	Pantone 7527C
Dimensions	301.6 x 84 x 92.5 (Length x Height x Width)
Storage	NAS, SD Card
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL

Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com www.MatrixVideoSurveillance.com







Call as: +91-9315441053 +91-9315441078



5MP IR Bullet Camera with 6mm Lens

DIMENSIONS (in mm)

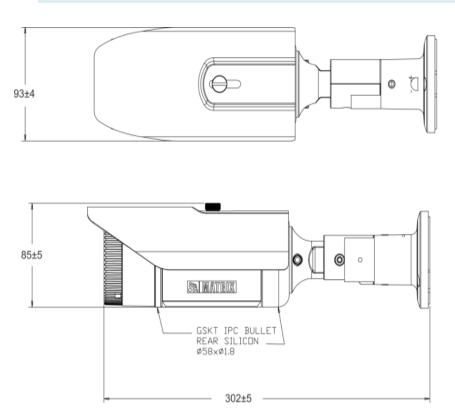

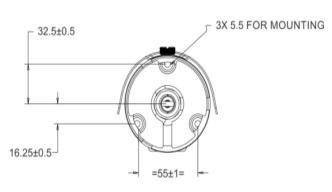

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Note: Certifications of SATATYA CIBR50FL60CWS shall be available from March'20.

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com

Call as : +91-9315441053 +91-9315441078

www.MatrixVideoSurveillance.com



