

2MP IR Dome Camera with 2.8mm Lens







SATATYA CIDR20FL28CWP 2MP IR Dome Camera with 2.8mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD **OF VIEW**



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +91-9315441053

+91- 9315441078







2MP IR Dome Camera with 2.8mm Lens



TECHNICAL SPECIFICATIONS	
	IMAGE SENSOR
Resolution	2 MP (1920 x 1080)
	1/2.8" SONY - CMOS 2MP Active Pixel
	Progressive Scan, Back Illuminated Image sensor
Sensor Type and Size	(EXMOR Technology - STARVIS Series)
	LENS
	Colour - 0.01 Lux @F1.2 (AGC ON)
Minimum Illumination	Monochrome - 0 Lux
Focal Length	2.8mm
Focus Range	0.3m to infinity
	HFOV - 113°
	VFOV - 61°
Field of View (FOV)	DFOV - 132°
Lens Mount	M12
Focus	Fixed focus
Aperture (F#)	F 1.2
Iris Type	Fixed
IR Range	50m
IR Led Wavelength	850nm
IR Switching	Auto/ Manual
	AUDIO INTERFACE
Audio IN	1
Audio OUT	1
Two-way Audio	Supported
Audio Compression	G.726 and G.711
Alarm In	Yes
Alarm Out	Yes
	HARDWARE SPECIFICATIONS
SD Card	Up to 512GB
Camera Adjustment Angle	Pan: 0° to 360°
	Tilt: 0° to 75°
	Rotation: 0° to 360°
	IMAGE AND VIDEO
No of Stream Profiles	4
	Profile 1: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)
	Profile 2: D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)
	Profile 3: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 5fps (MJPEG)
Stream Profiles	Profile 4: 720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264/MJPEG)

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com



Call as : +91-9315441053 +91-9315441078



Call as: +91-9315441053 +91-9315441078 WATRIX SECURITY SOLUTIONS

2MP IR Dome Camera with 2.8mm Lens

Available Resolutions	1920 x 1080, 720p, D1, 2CIF, CIF, QCIF
Max Resolution	1920 x 1080
Bitrate	128 kbps-8Mbps
Bitrate Type	CBR, VBR
Video Compression	H.265, H.264, MJPEG
Frame Rate	1-30fps
Shutter Speed	1/25-1/34000
Adaptive Streaming	Yes
ONVIF Profiles	S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	71db
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception, IP Conflict, Network Disconnect, Storage Full, Time Triggered
	EVENTS AND ACTIONS
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
	IE: Matrix ActiveX Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)
1.08.113	OPERATING PARAMETERS
Power Supply	12V (DC); 802.3af (PoE)
Power Consumption	<7W
Operating Humidity	Less than 90% RH (non-condensing)
Operating Temperature	-20°C to 50°C
Storage Temperature	-20°C to 50°C

E-mail: Inquiry@MatrixComSec.com

Customer Care: 1800-258-7747

Ample Trails

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078




2MP IR Dome Camera with 2.8mm Lens



SECURITY SOLUTIONS

PHYSICAL PARAMETERS	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)
Weight	1410gm
Colour	Pantone 7527C
Dimensions	Ф158 x 134 mm
Storage	NAS, SD Card
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com






Call as : +91-9315441053 +91-9315441078

MATRIX SECURITY SOLUTIONS

2MP IR Dome Camera with 2.8mm Lens

DIMENSIONS (in mm)

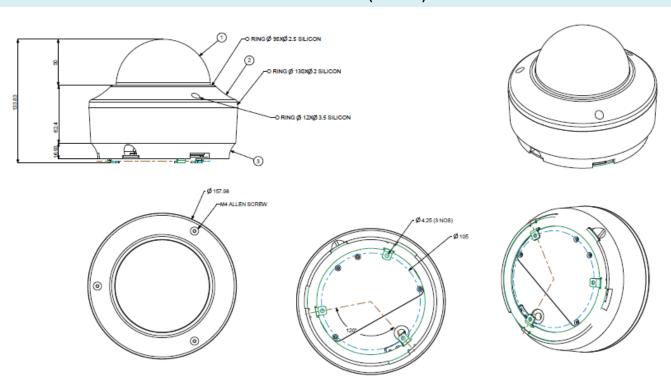

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Note: IK10 certificate shall be available from March'20.

Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91-9315441078



