

SATATYA CIDR20FL60CWP 2MP IR Dome Camera with 6mm Lens





Ample Trails

Made in India



SATATYA CIDR20FL60CWP 2MP IR Dome Camera with 6mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.



Call as : +91-9315441053 +91-9315441078



2MP IR Dome Camera with 6mm Lens



SECURITY SOLUTIONS

TECHNICAL SPECIFICATIONS				
IMAGE SENSOR				
Resolution	2 MP (1920 x 1080)			
	1/2.8" SONY - CMOS 2MP Active Pixel			
	Progressive Scan, Back Illuminated Image sensor			
Sensor Type and Size	(EXMOR Technology - STARVIS Series)			
LENS				
	Colour - 0.01 Lux @F1.2 (AGC ON)			
Minimum Illumination	Monochrome - 0 Lux			
Focal Length	6mm			
Focus Range	0.3m to infinity			
	HFOV - 56°			
	VFOV - 31°			
Field of View (FOV)	DFOV - 66°			
Lens Mount	M12			
Focus	Fixed focus			
Aperture (F#)	F 1.2			
Iris Type	Fixed			
IR Range	50m			
IR Led Wavelength	850nm			
IR Switching	Auto/ Manual			
AUDIO INTERFACE				
Audio IN	1			
Audio OUT	1			
Two-way Audio	Supported			
Audio Compression	G.726 and G.711			
Alarm In	Yes			
Alarm Out	Yes			
HARDWARE SPECIFICATIONS				
SD Card	Up to 512GB			
Camera Adjustment Angle	Pan: 0° to 360°			
	Tilt: 0° to 75°			
	Rotation: 0° to 360°			
IMAGE AND VIDEO				
No of Stream Profiles	4			
	Profile 1: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)			
	Profile 2: D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)			
Stream Profiles	Profile 3: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 5fps (MJPEG) Profile 4: 720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264/MJPEG)			
Stream Fromes	FIGHE 4. 7200/01/2017/01/2017 up to 30105 (1.205/1.204/101926)			

Customer Care: 1800-258-7747



Ample Trails

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +91-9315441053 +91-9315441078



2MP IR Dome Camera with 6mm Lens



Available Resolutions	1920 x 1080, 720p, D1, 2CIF, CIF, QCIF	
Max Resolution	1920 x 1080	
Bitrate	128 kbps-8Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/25-1/34000	
Adaptive Streaming	Yes	
ONVIF Profiles	S and G	
Edge Recording	Yes	
Alarm Recording	Pre and Post	
Motion Recording	Yes	
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings	
Privacy Masks	3	
WDR	True WDR (120dB)	
SNR	71db	
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure	
DNR	2D & 3D	
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Audio Exception, IP Conflict, Network Disconnect, Storage Full, Time Triggered	
	EVENTS AND ACTIONS	
Upload Image	SD, NAS, FTP	
Upload Clip	SD, NAS, FTP	
Notifications	E-mail, SMS, TCP	
	PROTOCOLS SUPPORTED	
	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP,	
Supported protocols	HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3	
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0	
	IE: Matrix ActiveX	
	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)	
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)	
	OPERATING PARAMETERS	
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	<7W	
Operating Humidity	Less than 90% RH (non-condensing)	
Operating Temperature	-20°C to 50°C	
Storage Temperature	-20°C to 50°C	

Customer Care: 1800-258-7747

Made in India

Ample Trails

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +91-9315441053 +91-9315441078



2MP IR Dome Camera with 6mm Lens



PHYSICAL PARAMETERS		
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	
Weight	1410gm	
Colour	Pantone 7527C	
Dimensions	Φ158 x 134 mm	
Storage	NAS, SD Card	
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL	

Customer Care: 1800-258-7747





E-mail: Inquiry@MatrixComSec.com


www.MatrixVideoSurveillance.com Call as : +91-9315441053 +91-9315441078



2MP IR Dome Camera with 6mm Lens



DIMENSIONS (in mm)

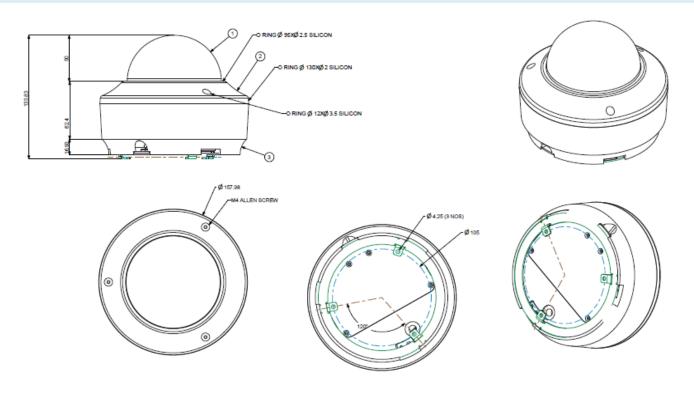

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Note: IK10 certificate shall be available from March'20.

Customer Care: 1800-258-7747





E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +97-9315441053 +97-9315441078