

2MP IR Dome Camera with 2.8-12mm Lens







SATATYA CIDR20MVL12CWP

2MP IR Dome Camera with 2.8-12mm
Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

Call as : +91-9315441053

+91- 9315441078

www.MatrixVideoSurveillance.com








2MP IR Dome Camera with 2.8-12mm Lens



TECHNICAL SPECIFICATIONS IMAGE SENSOR	
Resolution	1/2.8" SONY - CMOS 2MP Active Pixel
	Progressive Scan, Back Illuminated Image sensor
Sensor Type and Size	(EXMOR Technology - STARVIS Series)
7,1	LENS
	Colour - 0.01 Lux @F1.2 (AGC ON)
Minimum Illumination	Monochrome - 0 Lux
Focal Length	2.8mm-12mm
Focus Range	0.3m to infinity
	HFOV: 98° - 33°
	VFOV: 51° - 19°
Field of View (FOV)	DFOV: 116° - 38°
Lens Mount	M14
Focus	Automatic focus
Aperture (F#)	F 1.4 – F 2.8
Iris Type	P Iris
IR Range	50m
IR Led Wavelength	850nm
IR Switching	Auto/ Manual
	AUDIO INTERFACE
Audio IN	1
Audio OUT	1
Two-way Audio	Supported
Audio Compression	G.726 and G.711
Alarm IN	Yes
Alarm OUT	Yes
	HARDWARE SPECIFICATIONS
SD Card	Up to 512GB
Camera Adjustment Angle	Pan: 0° to 360°
	Tilt: 0° to 75°
	Zoom: 0° to 360°
IMAGE AND VIDEO	
No of Stream Profiles	4 Par Cit 4 4000 (204D) /720 (104/2015/015/015/015/015/015/015/015/015/015/
	Profile 1: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264)
	Profile 2: D1/2CIF/CIF/QCIF up to 30fps (H.265/H.264) Profile 3: 1080p(2MP)/720p/D1/2CIF/CIF/QCIF up to 5fps (MJPEG)
Stream Profiles	Profile 4: 720p/D1/2CIF/CIF/QCIF up to 30fps (N.265/H.264/MJPEG)
Jan Carri i Torrico	1101116 11 120p/ D 1/ 2011 / Cit / Cott up to 301p3 (11.203/11.204/110)1 Ed/

E-mail: Inquiry@MatrixComSec.com Customer Care: 1800-258-7747 www.MatrixVideoSurveillance.com







Call as: +91-9315441053 +91-9315441078

2MP IR Dome Camera with 2.8-12mm Lens

Available Resolutions	1920 x 1080, 720p, D1, 2CIF, CIF, QCIF
Max Resolution	1920 x 1080
Bitrate	128 kbps-8Mbps
Bitrate Type	CBR, VBR
Video Compression	H.265, H.264, MJPEG
Frame Rate	1-30fps
Shutter Speed	1/25-1/34000
Adaptive Streaming	Yes
ONVIF Profiles	S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	71db
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, Loitering, Missing/ Abandoned Object, Audio Exception, IP Conflict, Network Disconnect, Storage Full, Time Triggered, Alarm In, Object Counting
	EVENTS AND ACTIONS
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP,
Supported protocols	HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
	IE: Matrix ActiveX
	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)
	OPERATING PARAMETERS
Power Supply	12V (DC); 802.3af (PoE)
Power Consumption	<7W
Operating Humidity	Less than 90% RH (non-condensing)
Operating Temperature	-20°C to 50°C
Storage Temperature	-20°C to 50°C

E-mail: Inquiry@MatrixComSec.com

Customer Care: 1800-258-7747

Made in India

Ample Trails

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078



Call as: +91-9315441053 +91-9315441078

SECURITY SOLUTIONS

2MP IR Dome Camera with 2.8-12mm Lens


PHYSICAL PARAMETERS		
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)	
Weight	1410gm	
Colour	Pantone 7527C	
Dimensions	Ф158 x 134 mm	
Storage	NAS, SD Card	
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL	

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com

2MP IR Dome Camera with 2.8-12mm Lens



DIMENSIONS (in mm)

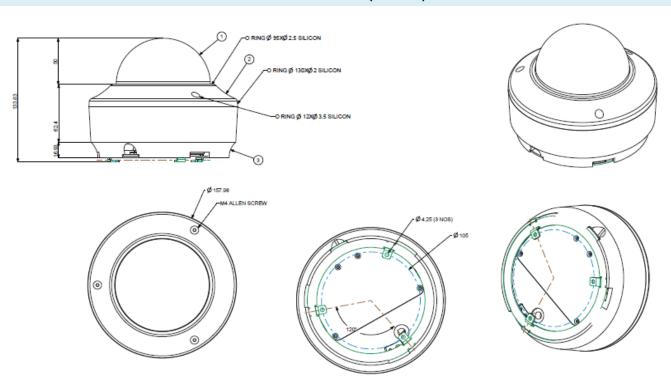

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91-9315441078

