

SATATYA CIDR30FL36CWS

3MP IR Dome Camera with 3.6mm Lens









SATATYA CIDR30FL36CWS

3MP IR Dome Camera with 3.6mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +97-9315441053

+91- 9315441078








SATATYA CIDR30FL36CWS

3MP IR Dome Camera with 3.6mm Lens



TECHNICAL SPECIFICATIONS	
IMAGE SENSOR	
Resolution	3 MP (2048 x 1536)
	1/2.8" SONY - CMOS 3MP Active Pixel
	Progressive Scan, Back Illuminated Image sensor
Sensor Type and Size	(EXMOR Technology - STARVIS Series)
LENS	
	Colour - 0.01 Lux @F1.2 (AGC ON)
Minimum Illumination	Monochrome - 0 Lux
Focal Length	3.6mm
Focus Range	0.3m to infinity
	HFOV - 82°
5'-14 - (\(\frac{1}{2} \) (\(\frac{1}2 \	VFOV - 59°
Field of View (FOV)	DFOV - 111°
Lens Mount	M12
Focus	Fixed focus
Aperture (F#)	F 1.2
Iris Type	Fixed
IR Range	50m
IR Led Wavelength	850nm
IR Switching	Auto/ Manual
HARDWARE SPECIFICATIONS	
SD Card	Up to 512GB
Camera Adjustment Angle	Pan: 0° to 360° Tilt: 0° to 75°
	Rotation: 0° to 360°
	IMAGE AND VIDEO
No of Stream Profiles	4
No of Stream Fromes	Profile 1: 2048X1536 @30fps (H.264/H.265)
	Profile 2: D1 @30fps (H.265/H.264)
	Profile 3: 2048x1536@5fps (MJPEG)
Stream Profiles	Profile 4: 720p @30fps (H.265/H.264/MJPEG)
Available Resolutions	2048 x 1536, 1920 x 1080, 720p, D1, 2CIF, CIF, QCIF
Max Resolution	2048 x 1536
Bitrate	128kbps-8Mbps
Bitrate Type	CBR, VBR
Video Compression	H.265, H.264, MJPEG
Frame Rate	1-30fps
Shutter Speed	1/25-1/17000 s

E-mail: Inquiry@MatrixComSec.com Customer Care: 1800-258-7747 www.MatrixVideoSurveillance.com







SATATYA CIDR30FL36CWS

MATRIX

+91- 9315441078

Call as : +91-9315441053

3MP IR Dome Camera with 3.6mm Lens

Adaptive Streaming	Yes
ONVIF Profiles	S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	73db
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage Full, Time Triggered
EVENTS AND ACTIONS	
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP,
Supported protocols	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0
	IE: Matrix ActiveX
Division	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)
2 6 1	OPERATING PARAMETERS
Power Supply	12V (DC); 802.3af (PoE)
Power Consumption	<7W
Operating Humidity	Less than 90% RH (non-condensing)
Operating Temperature	-20°C to 50°C
Storage Temperature	-20°C to 50°C
PHYSICAL PARAMETERS 10Page T/100PageTV Ethernet (PL 4E)	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)
Weight Colour	1410gm Pantone 7527C
	Φ158 x 134 mm
Dimensions	
Storage	NAS, SD Card
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com




Call as : +91-9315441053 +91-9315441078 3MP IR Dome Camera with 3.6mm Lens

Call as: +91-9315441053 +91-9315441078 MATRIX

SECURITY SOLUTIONS

DIMENSIONS (in mm)

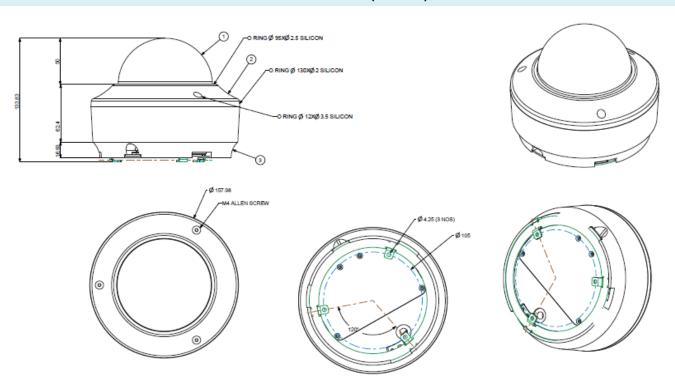

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91-9315441078



