

SATATYA CIDR30VL12CWS

3MP IR Dome Camera with 2.8-12mm Lens







SATATYA CIDR30VL12CWS 3MP IR Dome Camera with 2.8-12mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD **OF VIEW**



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +91-9315441053

+91- 9315441078







SATATYA CIDR30VL12CWS

3MP IR Dome Camera with 2.8-12mm Lens



TECHNICAL SPECIFICATIONS				
IMAGE SENSOR				
Resolution	3 MP (2048 x 1536)			
	1/2.8" SONY - CMOS 3MP Active Pixel			
	Progressive Scan, Back Illuminated Image sensor			
Sensor Type and Size	(EXMOR Technology - STARVIS Series)			
LENS				
	Colour - 0.01 Lux @F1.2 (AGC ON)			
Minimum Illumination	Monochrome - 0 Lux			
Focal Length	2.8mm-12mm			
Focus Range	0.3m to infinity			
	HFOV: 88°-30°			
	VFOV: 65°-23°			
Field of View (FOV)	DFOV: 117°-38°			
Lens Mount	M14			
Focus	Manual focus			
Aperture (F#)	F 1.4 – F 2.8			
Iris Type	P Iris			
IR Range	50m			
IR Led Wavelength	850nm			
IR Switching	Auto/ Manual			
	HARDWARE SPECIFICATIONS			
SD Card	Up to 512GB			
Camera Adjustment Angle	Pan: 0° to 360°			
	Tilt: 0° to 75°			
	Zoom: 0° to 360°			
IMAGE AND VIDEO				
No of Stream Profiles	4			
	Profile 1: 2048x1536 @30fps (H.264/H.265)			
	Profile 2: D1 @30fps (H.265/H.264)			
0. 0.01	Profile 3: 2048x1536 @5fps (MJPEG)			
Stream Profiles	Profile 4: 720p @30fps (H.265/H.264/MJPEG)			
Available Resolutions	2048 x 1536, 1920 x 1080, 720p, D1, 2CIF, CIF, QCIF			
Max Resolution	2048 x 1536			
Bitrate	128 kbps-8Mbps			
Bitrate Type	CBR, VBR			
Video Compression	H.265, H.264, MJPEG			
Frame Rate	1-30fps			
Shutter Speed	1/25-1/17000 s			

Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +91-9315441053 +91- 9315441078





SATATYA CIDR30VL12CWS

Call as : +91-9315441053 +91-9315441078

3MP IR Dome Camera with 2.8-12mm Lens

-71-9515441070				
	M	AT	RIX	
SECU	RITY	SOL	UTIONS)

Adaptive Streaming	Yes			
ONVIF Profiles	S and G			
Edge Recording	Yes			
Alarm Recording	Pre and Post			
Motion Recording	Yes			
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings			
Privacy Masks	3			
WDR	True WDR (120dB)			
SNR	73db			
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure			
DNR	2D &3D			
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage Full, Time Triggered			
EVENTS AND ACTIONS				
Upload Image	SD, NAS, FTP			
Upload Clip	SD, NAS, FTP			
Notifications	E-mail, SMS, TCP			
PROTOCOLS SUPPORTED				
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3			
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0			
	IE: Matrix ActiveX			
	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)			
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)			
OPERATING PARAMETERS				
Power Supply	12V (DC); 802.3af (PoE)			
Power Consumption	<8W			
Operating Humidity	Less than 90% RH (non-condensing)			
Operating Temperature	-20°C to 50°C			
Storage Temperature	-20°C to 50°C			
	PHYSICAL PARAMETERS			
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)			
Weight	1410gm			
Colour	Pantone 7527C			
Dimensions	Ф158 x 134 mm			
Storage	NAS, SD Card			
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL			

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com




Call as : +91-9315441053 +91-9315441078 SATATTA CIDRSUVLIZCWS

3MP IR Dome Camera with 2.8-12mm Lens



DIMENSIONS (in mm)

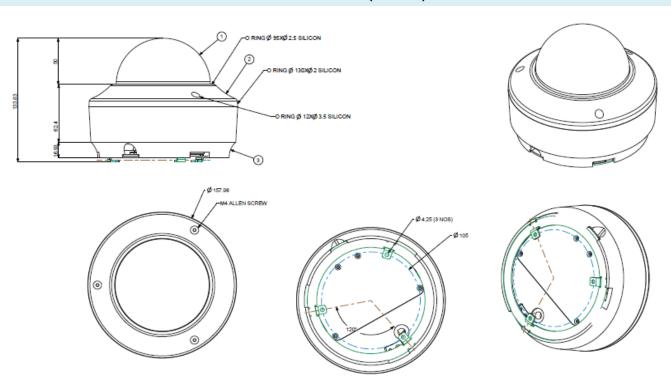

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91- 9315441078