


SATATYA CIDR50FL60CWS

5MP IR Dome Camera with 6mm Lens









SATATYA CIDR50FL60CWS

5MP IR Dome Camera with 6mm Lens

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

CERTIFICATION





Ample Trails









Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91- 9315441078



Call as: +91-9315441053 +91-9315441078 MATRIX

5MP IR Dome Camera with 6mm Lens

TECHNICAL SPECIFICATIONS		
IMAGE SENSOR		
Resolution	5 MP (2592 x 1944)	
	1/2.8" SONY - CMOS 5MP Active Pixel	
	Progressive Scan, Back Illuminated Image sensor	
Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
LENS		
	Colour - 0.01 Lux @F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	6mm	
Focus Range	0.3m to infinity	
	HFOV - 50°	
	VFOV - 37°	
Field of View (FOV)	DFOV - 62°	
Lens Mount	M12	
Focus	Fixed focus	
Aperture (F#)	F 1.6	
Iris Type	Fixed	
IR Range	50m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
HARDWARE SPECIFICATIONS		
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 75°	
	Rotation: 0° to 360°	
IMAGE AND VIDEO		
No of Stream Profiles	3	
	Profile 1: 2592X1944 @30fps (H.264/H.265)	
C. D. C.	Profile 2: VGA @30fps (H.265/H.264)	
Stream Profiles	Profile 3: 2048x1536@8fps (MJPEG)	
Available Resolutions	2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, VGA, CIF, QCIF	
	2592 x 1944	
Max Resolution Bitrate	128kbps-16Mbps	
	- · · · · · · · · · · · · · · · · · · 	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/25-1/59000	

E-mail: Inquiry@MatrixComSec.com

Customer Care: 1800-258-7747

Ample Trails

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078


SATATYA CIDR50FL60CWS

5MP IR Dome Camera with 6mm Lens



Adaptive Streaming	Yes	
ONVIF Profiles	S and G	
Edge Recording	Yes	
Alarm Recording	Pre and Post	
Motion Recording	Yes	
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings	
Privacy Masks	3	
WDR	True WDR (120dB)	
SNR	73db	
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure	
DNR	2D &3D	
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage full, Time triggered	
EVENTS AND ACTIONS		
Upload Image	SD, NAS, FTP	
Upload Clip	SD, NAS, FTP	
Notifications	E-mail, SMS, TCP	
PROTOCOLS SUPPORTED		
	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP,	
Supported protocols	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3	
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0	
	IE: Matrix ActiveX	
Plugins	Chrome: VLC plugin (2.0.4) and Quicktime(7.7.5) Mozilla: VLC plugin (2.0.4) and Quicktime(7.7.5)	
riugilis	OPERATING PARAMETERS	
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	<7W	
Operating Humidity	Less than 90% RH (non-condensing)	
Operating Temperature	-20°C to 50°C	
Storage Temperature	-20°C to 50°C	
Storage remperature	PHYSICAL PARAMETERS	
Communication interface 10Base-T/100BaseTX Ethernet (RJ-45)		
Weight	1410gm	
Colour	Pantone 7527C	
Dimensions	Φ158 x 134 mm	
Storage	NAS, SD Card	
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL	
certifications	CL, I CC, NOTIS, DIS, IF OU, INTO, OL	

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com






5MP IR Dome Camera with 6mm Lens

Call as: +91-9315441053 +91-9315441078



DIMENSIONS (in mm)

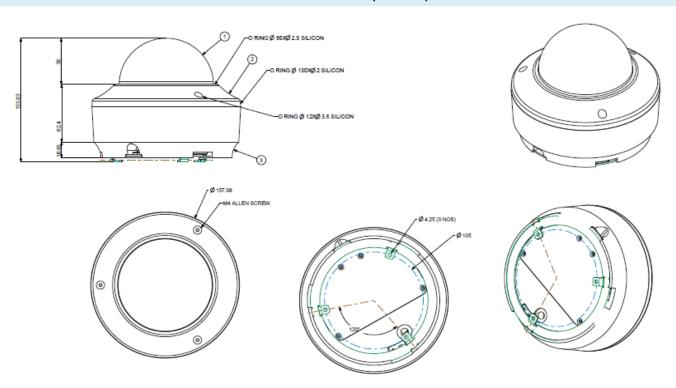

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Note: Certifications of SATATYA CIDR50FL60CWS shall be available from March'20.

Customer Care: 1800-258-7747 E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053
+91-9315441078



