

5MP IR Dome Camera with 2.7-13.5mm Lens







SATATYA CIDR50MVL12CWP 5MP IR Dome Camera with 2.7-13.5mm

Matrix Project Series IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



Lens

IVA



TRUE WDR



HIGHER FIELD **OF VIEW**



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com Call as : +91-9315441053

+91- 9315441078







5MP IR Dome Camera with 2.7-13.5mm Lens



TECHNICAL SPECIFICATIONS		
IMAGE SENSOR		
Resolution	5 MP (2592 x 1944)	
	1/2.8" SONY - CMOS 5MP Active Pixel	
	Progressive Scan, Back Illuminated Image sensor	
Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
LENS		
	Colour - 0.01 Lux @F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	2.7mm-13.5mm	
Focus Range	0.3m to infinity	
	HFOV: 106° - 32°	
	DFOV: 142° - 39°	
Field of View (FOV)	VFOV: 73° - 23°	
Lens Mount	M14	
Focus	Automatic focus	
Aperture (F#)	F 1.4 – F 3.2	
Iris Type	P Iris	
IR Range	50m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	HARDWARE SPECIFICATIONS	
Audio IN	1	
Audio OUT	1	
Two-way Audio	Supported	
Audio Compression	G.726 and G.711	
Alarm IN	Yes	
Alarm OUT	Yes	
HARDWARE SPECIFICATIONS		
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 75°	
	Zoom: 0° to 360°	
IMAGE AND VIDEO		
No of Stream Profiles	3	
	Profile 1: 2592X1944 @30fps (H.264/H.265)	
	Profile 2: VGA @30fps (H.265/H.264)	
Stream Profiles	Profile 3: 2048x1536 @8fps (MJPEG)	
Available Resolutions	2592x1944, 2592x1520, 2048x1536, 1920x1080, 720p, D1, 2CIF, VGA, CIF, QCIF	

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com

Ample Trails

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078



Call as: +91-9315441053 +91-9315441078

5MP IR Dome Camera with 2.7-13.5mm Lens

Max Resolution	2592X 1944	
Bitrate	128kbps-16Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
Shutter Speed	1/25-1/59000	
Adaptive Streaming	Yes	
ONVIF Profiles	S and G	
Edge Recording	Yes	
Alarm Recording	Pre and Post	
Motion Recording	Yes	
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings	
Privacy Masks	3	
WDR	True WDR (120dB)	
SNR	73db	
Image Enhancement	Saturation/Contrast/Sharpness/Brightness/Auto Exposure	
DNR	2D &3D	
	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection,	
	Object Intrusion/Zone Intrusion, Loitering, Missing/ Abandoned Object, Audio	
	Exception, IP Conflict, Network Disconnect, Storage Full, Time Triggered, Alarm	
Video Analytics	In, Object Counting	
	EVENTS AND ACTIONS	
Upload Image	SD, NAS, FTP	
Upload Clip	SD, NAS, FTP	
Notifications	E-mail, SMS, TCP	
PROTOCOLS SUPPORTED		
	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS,	
Supported protocols	TLS/SSL, FTP, ICMP, IGMP v2 & v3	
Web Viewer	Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0	
	IE: Matrix ActiveX	
	Chrome: VLC plugin (2.0.4) and Quicktime (7.7.5)	
Plugins	Mozilla: VLC plugin (2.0.4) and Quicktime (7.7.5)	
	OPERATING PARAMETERS	
Power Supply	12V (DC); 802.3af (PoE)	
Power Consumption	<7W	
Operating Humidity	Less than 90% RH (non-condensing)	
Operating Temperature	-20°C to 50°C	
Storage Temperature	-20°C to 50°C	

E-mail: Inquiry@MatrixComSec.com

Customer Care: 1800-258-7747

Made in India

Ample Trails

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078



Call as : +91-9315441053 +91-9315441078

MATRIX
SECURITY SOLUTIONS

5MP IR Dome Camera with 2.7-13.5mm Lens

PHYSICAL PARAMETERS	
Communication interface	10Base-T/100BaseTX Ethernet (RJ-45)
Weight	1410gm
Colour	Pantone 7527C
Dimensions	Ф158 x 134 mm
Storage	NAS, SD Card
Certifications	CE, FCC, ROHS, BIS, IP66, IK10, UL

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com www.MatrixVideoSurveillance.com




Made in India

Call as : +91-9315441053 +91-9315441078

5MP IR Dome Camera with 2.7-13.5mm Lens



DIMENSIONS (in mm)

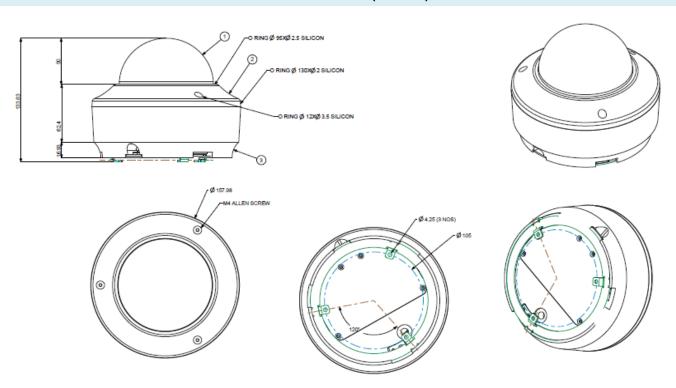

ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

* Specifications are subject to change without prior notice.

Note: Certifications of SATATYA CIDR50MVL12CWP shall be available from March'20.

Customer Care: 1800-258-7747 E-mail: lnquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as: +91-9315441053

+91-9315441078



