


SATATYA MIDR50FL60CWS

5MP IR Dome Camera with 6mm Lens









SATATYA MIDR50FL60CWS

5MP IR Dome Camera with 6mm Lens

Matrix Professional Series Dome IP Cameras are built using superior components such as Sony STARVIS sensor and higher MTF lens to offer unmatched image quality especially during the low light conditions. Powered by True WDR algorithm, these cameras offer consistent image quality even in highly varying lighting conditions. Built in intelligent analytics including Intrusion Detection, Trip Wire, etc. ensure real-time security. Moreover, H.265 compression and Automatic Motion based Frame Rate Reduction save bandwidth and storage up to 50%.

USP



SONY STARVIS SENSOR



SMART STREAMING



H.265



ADAPTIVE STREAMING



IVA



TRUE WDR



HIGHER FIELD OF VIEW



NAS

CERTIFICATION













Customer Care: 1800-258-7747

E-mail: Inquiry@MatrixComSec.com

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078





SATATYA MIDR50FL60CWS

5MP IR Dome Camera with 6mm Lens





TECHNICAL SPECIFICATIONS IMAGE SENSOR		
	1/2.8" SONY - CMOS 5MP Active Pixel	
	Progressive Scan, Back Illuminated Image sensor	
Sensor Type and Size	(EXMOR Technology - STARVIS Series)	
	LENS	
	Colour - 0.01 Lux @ F1.2 (AGC ON)	
Minimum Illumination	Monochrome - 0 Lux	
Focal Length	6mm	
Focus Range	0.3m to infinity	
	HFOV - 50°	
	VFOV - 37°	
Field of View (FOV)	DFOV - 62°	
Lens Mount	M12	
Focus	Fixed focus	
Aperture (F#)	F 1.6	
Iris Type	Fixed	
IR Range	30m	
IR Led Wavelength	850nm	
IR Switching	Auto/ Manual	
	HARDWARE SPECIFICATIONS	
SD Card	Up to 512GB	
Camera Adjustment Angle	Pan: 0° to 360°	
	Tilt: 0° to 75°	
	Rotation: 0° to 360°	
	IMAGE AND VIDEO	
No of Stream Profiles	3	
	Profile 1: 2592X1944 @30fps (H.264/H.265)	
C. D. C.	Profile 2: VGA @30fps (H.265/H.264)	
Stream Profiles	Profile 3: 2048x1536@8fps (MJPEG)	
Available Resolutions	2592 X 1944, 2592 X 1520, 2048 X 1536, 1920 X 1080, 720p, D1, 2CIF, VGA, CIF, QCIF	
Max Resolution	2592 X 1944	
Bitrate	128kbps-16Mbps	
Bitrate Type	CBR, VBR	
Video Compression	H.265, H.264, MJPEG	
Frame Rate	1-30fps	
	•	
Shutter Speed	1/25-1/59000	

E-mail: Inquiry@MatrixComSec.com

Customer Care: 1800-258-7747



www. Matrix Video Surveillance.com

Call as: +91-9315441053 +91-9315441078



SATATYA MIDR50FL60CWS

SECURITY SOLUTION

+91- 9315441078

Call as : +91-9315441053

5MP IR Dome Camera with 6mm Lens

Adaptive Streaming	Yes
ONVIF Profiles	Both S and G
Edge Recording	Yes
Alarm Recording	Pre and Post
Motion Recording	Yes
Video Parameters	Snapshot, Region of Interest (ROI), BLC, Day/Night Settings
Privacy Masks	3
WDR	True WDR (120dB)
SNR	73db
Image Enhancement	Saturation/ Contrast/ Sharpness/Brightness/Auto Exposure
DNR	2D &3D
Video Analytics	Motion/No Motion Detection, Tamper Detection, Trip/No Trip Detection, Object Intrusion/Zone Intrusion, IP Conflict, Network Disconnect, Storage Full, Time Triggered
Haland Lange	EVENTS AND ACTIONS
Upload Image	SD, NAS, FTP
Upload Clip	SD, NAS, FTP
Notifications	E-mail, SMS, TCP
	PROTOCOLS SUPPORTED
Supported protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTCP, RTSP, PPPOE, SMTP, NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Supported protocols Web Viewer	
	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3
Web Viewer	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5)
	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5)
Web Viewer Plugins	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS
Web Viewer Plugins Power Supply	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE)
Web Viewer Plugins	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W
Web Viewer Plugins Power Supply	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE)
Plugins Power Supply Power Consumption	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W
Plugins Power Supply Power Consumption Operating Humidity	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing)
Plugins Power Supply Power Consumption Operating Humidity Operating Temperature	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing) 0°C to 50°C
Plugins Power Supply Power Consumption Operating Humidity Operating Temperature	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing) 0°C to 50°C -20°C to 50°C
Plugins Power Supply Power Consumption Operating Humidity Operating Temperature Storage Temperature Communication interface Weight	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing) 0°C to 50°C -20°C to 50°C PHYSICAL PARAMETERS 10Base-T/100BaseTX Ethernet (RJ-45) 450gm
Plugins Power Supply Power Consumption Operating Humidity Operating Temperature Storage Temperature Communication interface	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing) 0°C to 50°C -20°C to 50°C PHYSICAL PARAMETERS 10Base-T/100BaseTX Ethernet (RJ-45)
Plugins Power Supply Power Consumption Operating Humidity Operating Temperature Storage Temperature Communication interface Weight	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing) 0°C to 50°C -20°C to 50°C PHYSICAL PARAMETERS 10Base-T/100BaseTX Ethernet (RJ-45) 450gm
Plugins Power Supply Power Consumption Operating Humidity Operating Temperature Storage Temperature Communication interface Weight Colour	NTP, HTTPS, TLS/SSL, FTP, ICMP, IGMP v2 & v3 Supported in IE 8.0-11.0, Firefox 15.0-47.0, Chrome 20.0-54.0 IE: Matrix ActiveX Chrome: VLC plugin(2.0.4) and Quicktime(7.7.5) Mozilla: VLC Plugin(2.0.4) and Quicktime(7.7.5) OPERATING PARAMETERS 12V (DC); 802.3af (PoE) <5.5W Less than 90% RH (non-condensing) 0°C to 50°C -20°C to 50°C PHYSICAL PARAMETERS 10Base-T/100BaseTX Ethernet (RJ-45) 450gm Pantone 7527C

E-mail: Inquiry@MatrixComSec.com

Customer Care: 1800-258-7747




www.MatrixVideoSurveillance.com


Call as : +91-9315441053 +91-9315441078

Call as: +91-9315441053 +91-9315441078

MATRIX

DIMENSIONS (in mm)

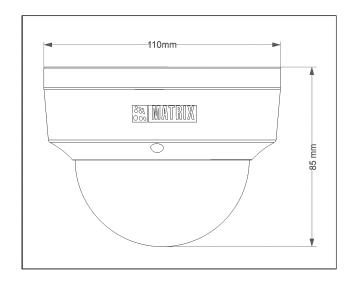



ABOUT MATRIX

Established in 1991, Matrix is a leader in security and telecom solutions for modern businesses and enterprises. Matrix, an innovative, technology driven and customer focused organization, is committed to keep pace with the revolutions in security and telecom industries. With more than 40% of its human resources dedicated to the development of new products, Matrix has launched cutting-edge products such as Unified Communications, IP-PBX, Universal Gateways, Convergence, VOIP Gateways, GSM Gateways, IP Video Surveillance, Access Control and Time-Attendance. These solutions are feature-rich, reliable and conform to the international standards. Having global footprints in Europe, North America, South America, Africa and Asia through an extensive network of more than 1000 system integrators, Matrix ensures that the products serve the needs of its customers faster and longer. Matrix has gained trust and admiration of customers representing the entire spectrum of industries. Matrix has won many national and international awards for its innovative products.

E-mail: Inquiry@MatrixComSec.com

* Specifications are subject to change without prior notice.

Note: Certifications of SATATYA MIDR50FL60CWS shall be available from March'20.

Customer Care: 1800-258-7747

Ample Trails

www.MatrixVideoSurveillance.com

Call as : +91-9315441053 +91-9315441078