




# AIFACE-PRO 3000



## Facial Attendance and Access Control

### Storage Capacity

Face ID Capacity	3000
Card Capacity	3000
Max User	3000
Log Capacity	50,000

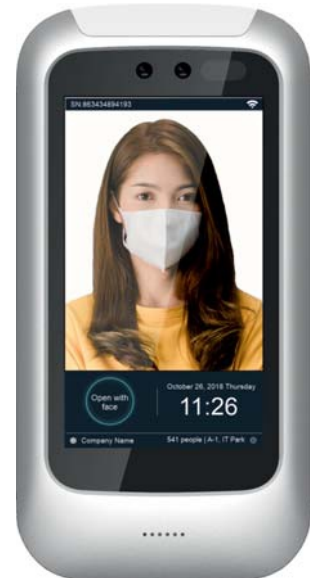

### Features

5-inch capacitive touch screen
DualCoreARM Cortex-A7@900 MHZ Processor
Remotely Firmware Upgradation.
Detect 5 person at a time
5-inch IPS display all-sight LCD touch screen with 480*854 resolution.
IP54 Grade Highly finished slim device.
Highly reliable and durable
Recognition speed 0.5 seconds

# AIFACE-PRO 3000

## Communication Interface

Communication	WIFI, TCP/IP, USB
---------------	-------------------

## Biometric

Push Data	YES
Remote firmware update	YES
FAR	0.001%
Accuracy ratio	99.27%
Processor	Dual Core ARM Cortex-A7 @900MHz
OS	Linux
Verification time	<=1 second
Mifare card	Yes

## Audio/Visual

LCD	5.0" IPS touch screen display
Shutter type	Electronic Rolling Shutter
Language	English

## Access control

Wiegand out	YES
Relay	YES
Live Detection	YES
Storage	512MB RAM, 4GB ROM

## Power & Environment

Operating Temperature	-10°C ~ 50°C
Power	12V DC / 2A
Dimension	185.8 x 93.7 x 22.5



Auto Focus



Autofill light



Long Distance Verification

Software

Web & Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App



+91 931 544 1078



www.Ampletrails.com



info@Ampletrails.com