

MULTI-BIO TIME & ATTENDANCE SYSTEM

SPECIFICATION	500 (1:N)
FACE CAPACITY	
FINGER CAPACITY	2000
CARD CAPACITY	2000
MAX USER	2000
LOG CAPACITY	1,50,000



N-BM60W Pro "With Impressive features leveled up to meet your demands."

FEATURES

High Speed And Accurate Face Identifcation

Good Adaptation For Dry, Moist and Rough Fingerprints.

Face, Fingerprint, Card, Password Authentication.


Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.

N-BM60W Pro

Communication Interface		
Communication	Wi-Fi, TCP/IP, USB Host	
Biometric		
Push Data	YES	
Sensor type	500 DPI	
FAR	0.01%	
FRR	0.001%	
OS	Linux	
Verification time	<1 second	
RF card options	Proximity / Mifare (Optional)	

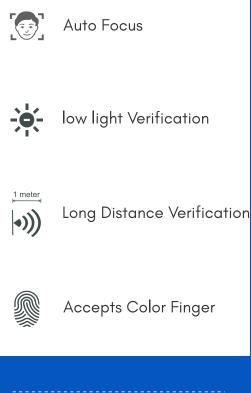

Audio/Visual

Display	2.8" IPS LCD color screen
LED Indicator	Green/Red
LED for day night vision	Array LED
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English
Standard Functions	Record Query, Auto Status,
	T9 Input, 14 Digit User ID

Software Desktop, Web, Cloud



Time Attendance



Employee Self Service

1	
	<u> </u>
	=

Mobile App

Power & Enviroment

Power	5V 1Amps (BIS standard)
Operating Temperature	0°c ~ 50°c
Operating Humidity	20% - 80%
Dimension	160 x 150 x 65 mm