



AFACIE
ERIS
ERIS
ERIS

ERIS
ERIS
ERIS
AFACIE



+91-9315441078/9034757673



info@ampletrails.com




www.ampletrails.com

AIFACE ERIS

Display	4-inch color LED touch screen
Camera	2MP binocular camera
Operation System	Linux
Hardwar	CPU: Dual Core@1GHz RAM: 1GB ROM: 8GB
Authentication method	Face / Fingerprint / Card/ Password
User Capacity	3,000
Face Template Capacity	3,000
Fingerprint Template Capacity	3,000
Card Capacity	3,000
Transaction Capacity	2,00,000
Biometric Verication Speed	< 0.35s (Facial Recognition) < 0.5s (Fingerprint Recognition)
False Acceptance Rate (FAR) %	<0.01% (Facial Recognition) <0.0001% (Fingerprint)
False Rejection Rate (FRR) %	<0.02% (Facial Recognition) <0.01% (Fingerprint)
Optional Card Type	HID Prox@125 kHz Mifare@13.56 MHZ
Communication	TCP/IP, Wiegand (Input & Output),RS485, Wi-Fi (Optional)
Push Data	Yes
Access Control Interface	Electro Magnetic Lock/ Electric Lock, Door Sensor, Exit Button, Alarm Output
Power Supply	DC 12V 3A
Operating Temperature	-5°c to 45°c
Operating Humidity	10% to 90% RH
Dimensions	183 mm*88 mm*20.5 mm (L*W*H)
Supported Software	eTimetracklite Software, ebioServer



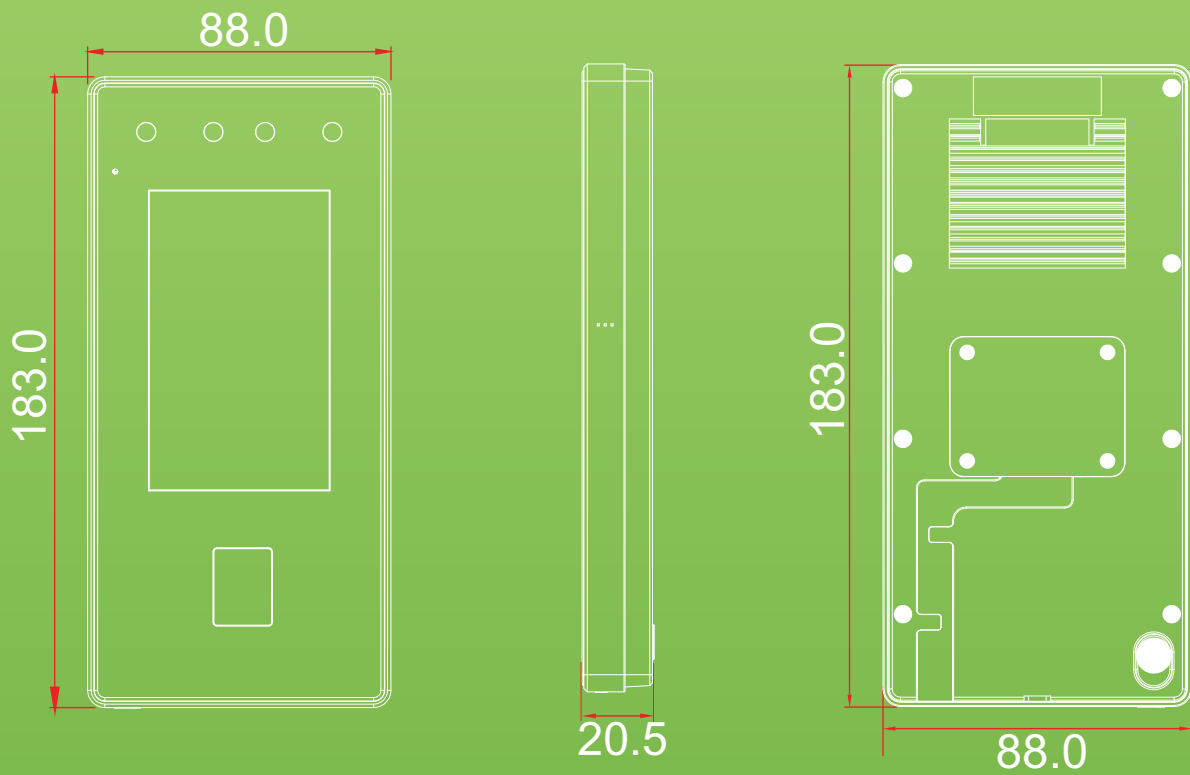

DIMENSION

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.



+91-9315441078/9034757673



info@ampletrails.com



www.ampletrails.com