




MULTI LANE SWING BARRIER SB-ES-3216-2



+91-9315441078/9034757673

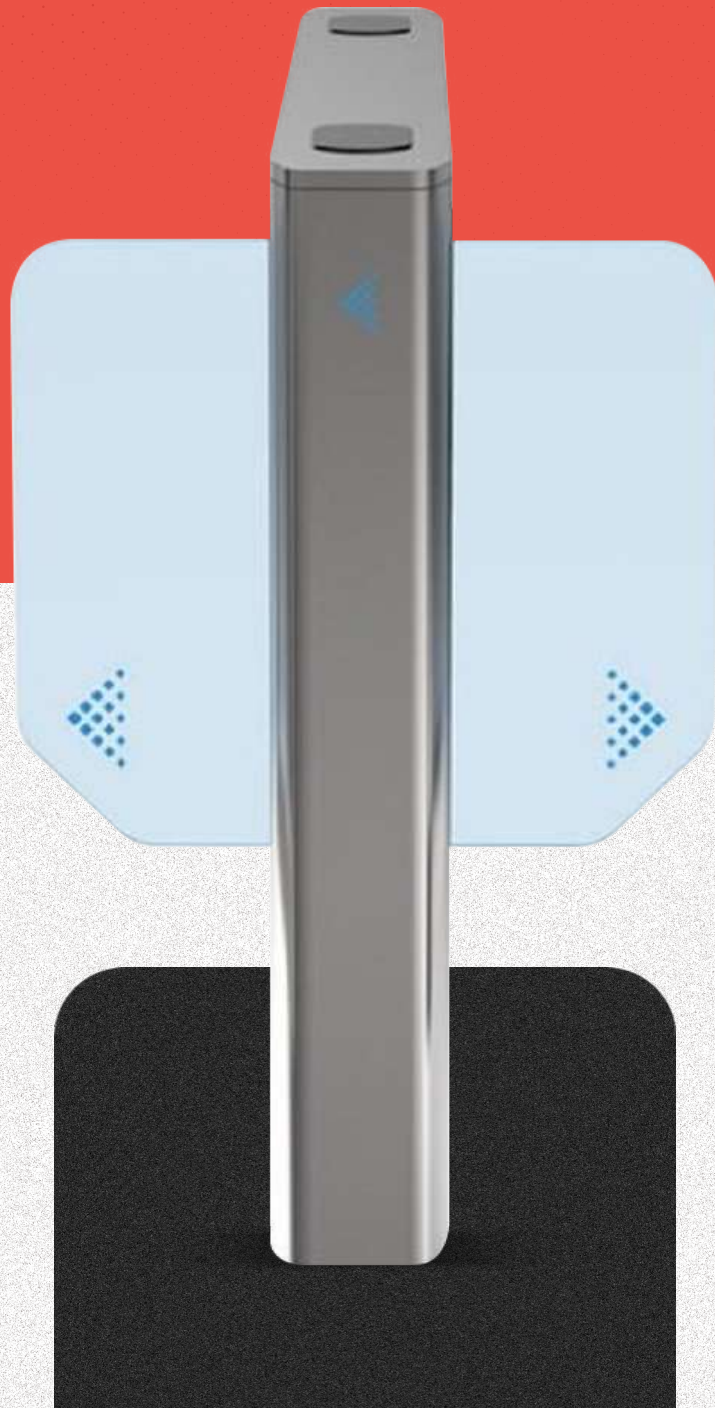

info@ampletrails.com



www.ampletrails.com

Specification

Size (L*W*H) : 1400*160*980mm
Fuselage material : Top cover 1.2mm+body 0.9mm 304 brushed plate
Diaphragm material : 8mm clear acrylic
Bae material : 10mm clear acrylic
Pass width : 600-900mm
Movement : Brushless swing brake integrated movement
Power supply : 24V 150W
Input voltage : AC100V~240V,50/60HZ
Equipment power : 55W
Drive motor : Fengdun DC brushless 90K 30W
Pass rate : Open 50 people/min; Usually closed 35 people/min
Speed of opening and closing : Adjustable from 0.5s to 1.5s
Sensor pairs : 6pairs
Pilot lamp : Three color light panel+three color light strip
Communication mode : Dry contact
Controls : 1V2 brushless simplified board +electric control box+mesh board box
Temperature : -20°C~+70°C | Noise : <65dB
Humidity : <90% No condensation
Class of protection : IP4X

Dimension

