

SWING BARRIER

SB-Q-3200

Specification

Passage width (max) : 600mm
Through put rate : 40p/m
Power supply : 220~240VAC
Operational voltage : 24VDC
Max power consumption : 50w
Frequency : 50~60hz
Protection level : Ip54
Working temperature :- 25°C~+70°C
Electro-magnetic drive : DC
Dimension excluding bars in mm :
1400x185x1020
Net weight including bars : 99Kg (single door)
124Kg (double door)

Features

Use IC cards, ID cards, bar code or magnetic cards as automatic identification system.

Display has been in use for statics and numbers with voice and strobe light alerts

A combination of infrared sensors and police anti-illegal entry in to pedestrian access.

Double anti-clipping function, photocell anti-clipping and mechanical anti-clipping


The barrier can be set to delay closing in 1~60s after valid card reading

Single passage in the set direction

Bi-directional single passage

Plastic toughened glass

Always free or locked

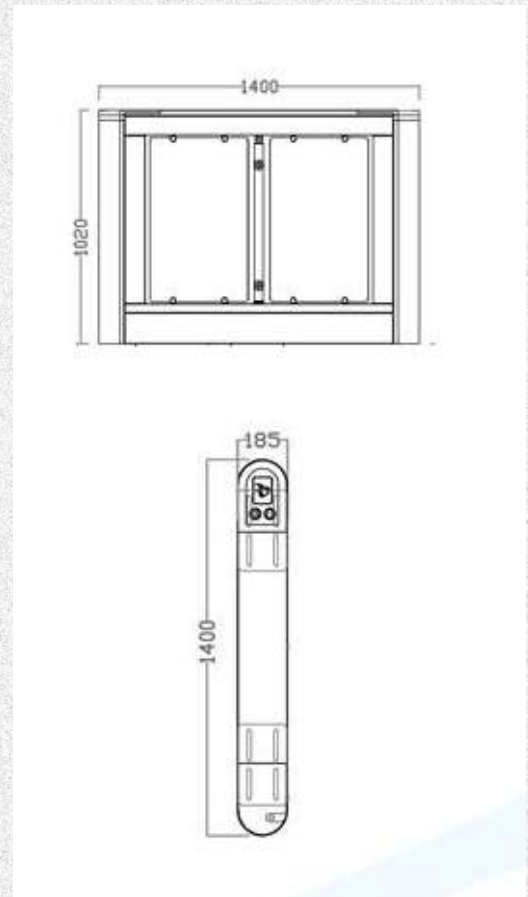

SB-Q-3200
SB-Q-3200
SB-Q-3200

