



SWING BARRIER

SB-Q-3000



+91-9315441078/9034757673



info@ampletrails.com



www.ampletrails.com

Specification


- Passage width (max) : 600mm
- Throughput rate : 40p/m
- Power supply : 220~240VAC
- Operational Voltage : 24VDC
- Max power consumption : 50w
- Frequency : 50~60hz
- Protection level : IP54
- Working temperature :- 25°C~+70°C
- Electro-magnetic drive:DC
- Dimension excluding bars in mm : 1400x185x1020
- Net weight including bars : 99Kg (single door)
124Kg(double door)

Features

- Use IC cards, ID cards, barcode or magnetic cards as automatic identification system.
- Display has been in use for statics and numbers with voice and strobe light alerts
- A combination of infrared sensors and police anti-illegal entry in to pedestrian access.
- Double anti-clipping function, photo cell anti-clipping and mechanical anti-clipping
- The barrier can be set to delay closing in 1~60s after valid card reading
- Single passage in the set direction
- Bi-directional single passage
- Plastic toughened glass
- Always free or locked



Dimension

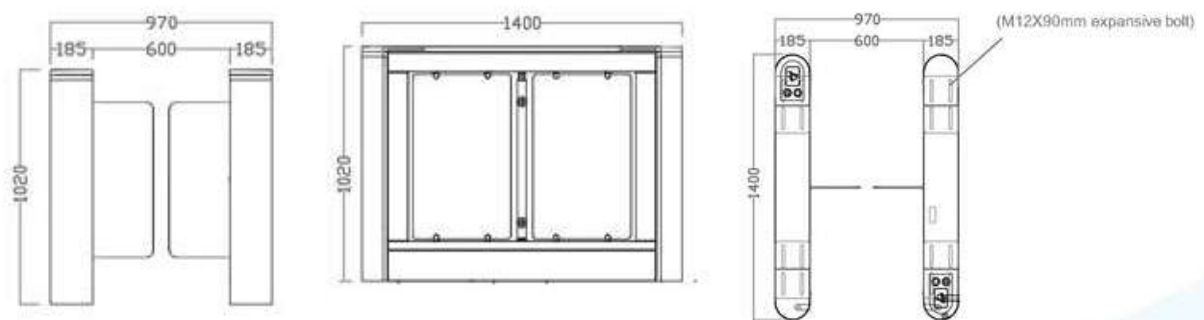

Disclaimer :

Brief specification are mentioned here. Specifications may change without prior notice. Customer are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.



+91-9315441078/9034757673



info@ampletrails.com



www.ampletrails.com