

Aiface Earth



Specification


Display : 7-inch Touch Screen
Face Capacity : 20,000
Transactions : 300,000
Face Recognition Distance : Up to 2m
Operation System : Linux
Standard Functions : Push data, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Holidays, Anti-Passback, Record Query, Tamper Switch Alarm, Multiple Verify Modes
Hardware : 1.2MHz Dual Core CPU Memory 2048MB RAM / 16834MB Flash, 5MP WDR Camera, Adjustable Light Brightness LED

Communication : TCP/IP, USB
Wiegand input / output, RS485*
Access Control Interface : 3rd Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input
Optional Functions : 125KHz ID card (EM) / 13.56MHz IC card
Facial Recognition Speed : ≤1s

Power Supply : 12V 3A
Working Humidity : 20% - 80%
Working Temperature : 0 °C – 45 °C
Dimensions (W*H*D) : 91.93* 202.93* 21.5mm
Supported Software : eTimetracklite
Other Features

- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack and 3D mask attack.
- Visible light facial recognition
- Supplement light with adjustable brightness

Dimension

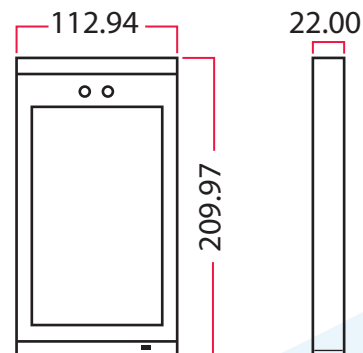

Disclaimer : Brief specifications are mentioned here. Specifications may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.