




MINI UPS

Biometric/Cctv/Router

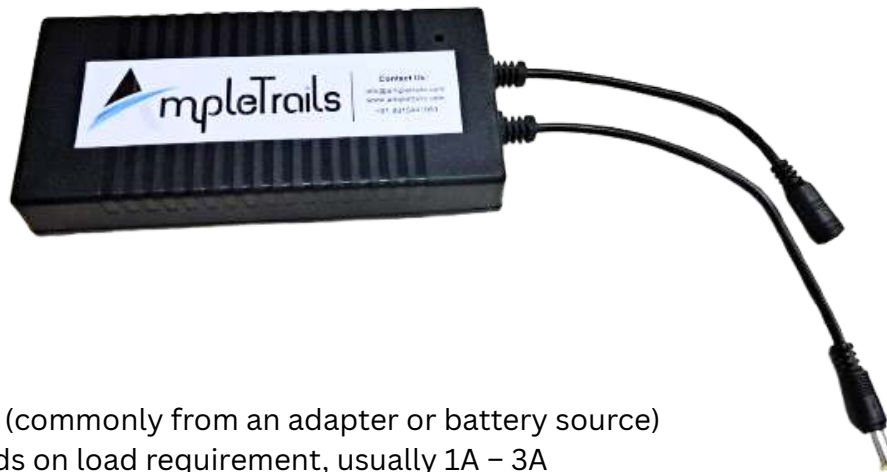

Input

- Voltage: 12V DC (commonly from an adapter or battery source)
- Current: Depends on load requirement, usually 1A – 3A
- Connector: 12V DC (Female DC barrel jack 5.5mm × 2.1mm or 5.5mm × 2.5mm)

Output

- Voltage: 12V DC
- Current capacity: Max 3A
- Connector: 12V DC (Male DC barrel jack 5.5mm × 2.1mm or 5.5mm × 2.5mm)

Battery (Inside UPS)

- Type: Lithium-ion
- Capacity: Usually 6*2000mAh
- Total Cells: 6 cells
- Backup time: 2 to 8 hours (depends on load, e.g., router consumes ~12V 1A → 3–4 hrs backup)

Features

- Plug-and-play between adapter and device (inline UPS)
- Comes with inbuilt BMS(Battery management system)
- Auto-switch: Instantly switches to battery during power cut (<10ms)
- Mini UPS 12V 3A, 12000mAh → for Wi-Fi routers, Biometric, CCTV
- Dimension: H(23mm)*W(75mm)*L(165mm)